



1. Brightness customization 700-5000cd/m².
2. Outdoor sunlight readable.
3. Low power consumption.
4. High uniformity up to 85% .
5. Long lifetime, 50K hours(Typ), up to 80K hours
6. Aluminium backlight structure with good heat dissipation.
7. Wide temperature range up to -30°C-80°C.
8. High shock resistance and high stability.


| No. | Size | Part No. | Brightness | Power | Resolution | Operating Temp. | Active Area | Outline Dimension | View Angle | Interface | Contrast |
|-----|------|-------------------------|------------|-------|------------|-----------------|-----------------|-------------------|-------------|----------------------|----------|
| 1 | 10.4 | LCMA-RX0104GR02-C150 | 1500 | 10 | 1024*768 | -30~80°C | 210.43*157.824 | 227*175.8*9.2 | 85/85/85/85 | LVDS (1 ch, 6/8-bit) | 900:1 |
| 2 | 12.1 | LCMA-RX0121GR01-C100 | 1000 | 12 | 1024*768 | -30~80°C | 245.76*184.32 | 260.5*204*8.46 | 88/88/88/88 | LVDS(1 ch, 6/8-bit) | 1000:1 |
| 3 | 13.3 | LCMA-RX0133BG02-C080 | 800 | 13.5 | 1920*1080 | -20~70°C | 293.76*165.24 | 307.6*183.05*6.7 | 88/88/88/88 | eDP (2 Lanes) | 1000:1 |
| 4 | 15.0 | LCMA-RX0150GB03-C100 | 1000 | 16.6 | 1024*768 | -20~70°C | 304.128*228.096 | 326.5*253.5*9.7 | 89/89/89/89 | LVDS (1 ch, 8-bit) | 1000:1 |
| 5 | 15.6 | LCMA-RX0156GI01-C100 | 1000 | 14 | 1920*1080 | -20~70°C | 344.16*193.59 | 360*212.3*6.3 | 89/89/89/89 | eDP (2 Lanes) | 1000:1 |
| 6 | 17.0 | LCMA-RX0170GA02-C100 | 1000 | 25 | 1280*1024 | 0~50°C | 337.92*270.336 | 358.5*296.5*10.3 | 85/85/80/80 | LVDS (2 ch, 8-bit) | 1000:1 |
| 7 | 17.3 | LCMA-RX0173GA01-C080 | 800 | 26 | 1920*1080 | 0~70°C | 381.888*214.812 | 403*240*13 | 80/80/60/80 | LVDS (2 ch, 8-bit) | 600:1 |
| 8 | 18.5 | LCMA-RX0185GB06-C100 | 1000 | 28 | 1920*1080 | 0~50°C | 408.96*230.04 | 430.37*254.6*11.2 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1000:1 |
| 9 | 18.5 | LCMA-RX0185GB03-C100 V1 | 1000 | 27 | 1920*1080 | -30~80°C | 408.96*230.04 | 430.4*254.6*12 | 85/85/85/85 | LVDS (2 ch, 8-bit) | 1000:1 |
| 10 | 19.0 | LCMA-RX0190GB01-C070 | 700 | 18.2 | 1280*1024 | 0~50°C | 374.784*299.82 | 396*324*10.4 | 85/85/80/80 | LVDS (2 ch, 8-bit) | 1200:1 |
| 11 | 21.5 | LCMA-RX0215GB08-C150 | 1500 | 57.5 | 1920*1080 | -20~70°C | 476.64*268.11 | 502.8*299.18*16.8 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1000:1 |
| 12 | 21.5 | LCMA-RX0215GB16-C100 | 1000 | 40 | 1920*1080 | -20~70°C | 476.64*268.11 | 495.6*292.2*9.5 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1000:1 |
| 13 | 23.8 | LCMA-RX0238GA01-C150 | 1500 | 58 | 1920*1080 | 0~50°C | 527.04*296.46 | 557.2*326.6*17.5 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 3000:1 |
| 14 | 24 | LCMA-RX0240GA01-C100 | 1000 | 36 | 1920*1080 | -20~70°C | 531.36*298.89 | 556*323.2*17 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 5000:1 |
| 15 | 27 | LCMA-RX0270GA07-C070 | 700 | 44 | 1920*1080 | 0~50°C | 597.6*336.15 | 613.6*356.85*10.5 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 3000:1 |
| 16 | 27 | LCMA-RX0270GB01-C100 | 1000 | 35 | 1920*1080 | 0~50°C | 597.888*336.312 | 611.5*335.8*13.2 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1000:1 |
| 17 | 32 | LCMA-RX0320GI04-C100 | 1000 | 131 | 3840*2160 | 0~50°C | 698.4*392.85 | 751.5*446.01*30.5 | 89/89/89/89 | V-by-One 8 lane | 3000:1 |
| 18 | 32 | LCMA-RX0320GB01-C150 | 1500 | 76.5 | 1920*1080 | -20~70°C | 698.4*392.85 | 729.4*424.2*29.5 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1200:1 |
| 19 | 32 | LCMA-RX0320GL18-C120 | 1200 | 59 | 1920*1080 | -20~70°C | 698.4*392.85 | 729.4*424.2*29.5 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1300:1 |
| 20 | 43 | LCMA-RX0430GL01-C150 | 1500 | 120 | 1920*1080 | 0~50°C | 941.184*529.416 | 973.2*561.5*29.5 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1000:1 |
| 21 | 43 | LCMA-RX0430GB02-C150 | 1500 | 101 | 1920*1080 | -20~70°C | 941.18*529.42 | 973.2*561.5*29.5 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1200:1 |
| 22 | 43 | LCMA-RX0430GB12-C050 | 500 | 48 | 3840*2160 | 0~50°C | 941.18*529.42 | 973.2*561.5*20.3 | 89/89/89/89 | V-by-One 8 lane | / |
| 23 | 49 | LCMA-RX0490GL10-C150 | 1500 | 158 | 3840*2160 | 0~50°C | 1073.78*604 | 1103.8*634*31.5 | 89/89/89/89 | V-by-One 8 lane | 1100:1 |
| 24 | 49 | LCMA-RX0490GL09-C250 | 2500 | 172 | 1920*1080 | 0~50°C | 1073.78*604 | 1103.8*634*31.5 | 89/89/89/89 | V-by-One 8 lane | / |
| 25 | 55 | LCMA-RX0550GR03-C070 | 700 | 100 | 3840*2160 | 0~50°C | 1209.6*680.4 | 1233.8*704.6*17.7 | 89/89/89/89 | V-by-One 8 lane | 1300:1 |
| 26 | 55 | LCMA-RX0550GB03-C150 | 1500 | 180 | 1920*1080 | -30~80°C | 1209.6*680.4 | 1243*725.4*36.7 | 89/89/89/89 | LVDS (2 ch, 10-bit) | 1200:1 |





1. Brightness customization 700-5000cd/m².
2. Outdoor sunlight readable.
3. Low power consumption.
4. High uniformity up to 85% .
5. Long lifetime, 50K hours(Typ), up to 80K hours
6. Aluminium backlight structure with good heat dissipation.
7. Wide temperature range up to -30°C-80°C.
8. High shock resistance and high stability.

| No. | Size | Part No. | Brightness | Power | Resolution | Operating Temp. | Active Area | Outline Dimension | View Angle | Interface | Contrast |
|-----|------|----------------------|------------|-------|------------|-----------------|-----------------|--------------------|-------------|--------------------|----------|
| 1 | 32 | LCMA-RX0320GB06-Z200 | 2000 | 120 | 1920*1080 | -20~70°C | 698.4*392.85 | 731.9*431.4*56 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1200:1 |
| 2 | 32 | LCMA-RX0320GL17-Z080 | 800 | 70.5 | 3840*2160 | 0~50°C | 697.31*292.23 | 727*421*28.9 | 89/89/89/89 | eDP (4 Lanes) | 1300:1 |
| 3 | 32 | LCMA-RX0320GL20-Z200 | 2000 | 97 | 1920*1080 | -20~70°C | 698.4*392.85 | 731.9*431.4*56 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1300:1 |
| 4 | 43 | LCMA-RX0430GB03-Z200 | 2000 | 145 | 1920*1080 | -20~70°C | 940.896*529.254 | 965.2*553.4*55 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1200:1 |
| 5 | 43 | LCMA-RX0430GL19-Z100 | 1000 | 144 | 3840*2160 | 0~50°C | 941.18*529.42 | 973.8*567*58.4 | 89/89/89/89 | V-by-One 8 lane | 1100:1 |
| 6 | 43 | LCMA-RX0430GL13-Z200 | 2000 | 119 | 1920*1080 | 0~50°C | 940.9*529.3 | 973.8*567*58 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1200:1 |
| 7 | 49 | LCMA-RX0490GL04-Z250 | 2500 | 230 | 1920*1080 | 0~50°C | 1073.8*604 | 1098*628*55 | 89/89/89/89 | LVDS (2 ch, 8-bit) | 1000:1 |
| 8 | 49 | LCMA-RX0490GL14-Z350 | 3500 | 288 | 3840*2160 | 0~50°C | 1073.78*604 | 1106.4*641.6*57.5 | 89/89/89/89 | V-by-One 8 lane | 1100:1 |
| 9 | 55 | LCMA-RX0550GL22-Z300 | 3000 | 180 | 3840*2160 | -20~70°C | 1209.6*680.4 | 1242.1*718*55.6 | 89/89/89/89 | V-by-One 8 lane | 1300:1 |
| 10 | 55 | LCMA-RX0550GL24-Z200 | 2000 | 311 | 1920*1080 | 0~50°C | 1209.6*680.4 | 1242.1*718*58.1 | 89/89/89/89 | V-by-One 8 lane | 1300:1 |
| 11 | 65 | LCMA-RX0650GL04-Z200 | 2000 | 326 | 1920*1080 | 0~50°C | 1428.48*803.52 | 1452.4*827.5*59 | 89/89/89/89 | V-by-One 8 lane | 1300:1 |
| 12 | 65 | LCMA-RX0650GB04-Z200 | 2000 | 366 | 3840*2160 | -30~80°C | 1428.48*803.52 | 1452.4*827.5*61 | 89/89/89/89 | V-by-One 8 lane | 1200:1 |
| 13 | 75 | LCMA-RX0750GL02-Z200 | 2000 | 432 | 3840*2160 | 0~50°C | 1649.66*927.94 | 1689*971*66.15 | 89/89/89/89 | V-by-One 8 lane | 1200:1 |
| 14 | 75 | LCMA-RX0750GB02-Z350 | 3500 | 760 | 3840*2160 | -30~80°C | 1649.7*927.9 | 1683*975.4*55.3 | 89/89/89/89 | V-by-One 8 lane | 1200:1 |
| 15 | 86 | LCMA-RX0860GL04-Z250 | 2500 | 1100 | 3840*2160 | 0~50°C | 1895.04*1065.94 | 1933*1108.5*72.1 | 89/89/89/89 | V-by-One 8 lane | 1200:1 |
| 16 | 98 | LCMA-RX0980GL01-Z200 | 2000 | 1300 | 3840*2160 | 0~50°C | 2158.85*1214.35 | 1247.6*2182.0*63.5 | 89/89/89/89 | V-by-One 8 lane | / |

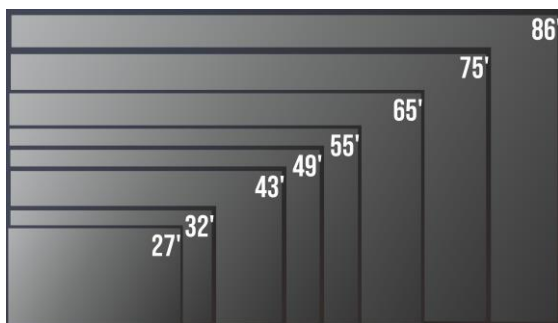

16:9

1920*1080
3840*2160

700-5000
cd/m²

-0~50°C
-20~70°C
-30~80°C



Bus stop



Outdoor advertising machine



Garbage sorting box



Outdoor newspaper column